


6.2. Model PSEM 200 - without serpentine, enamelled

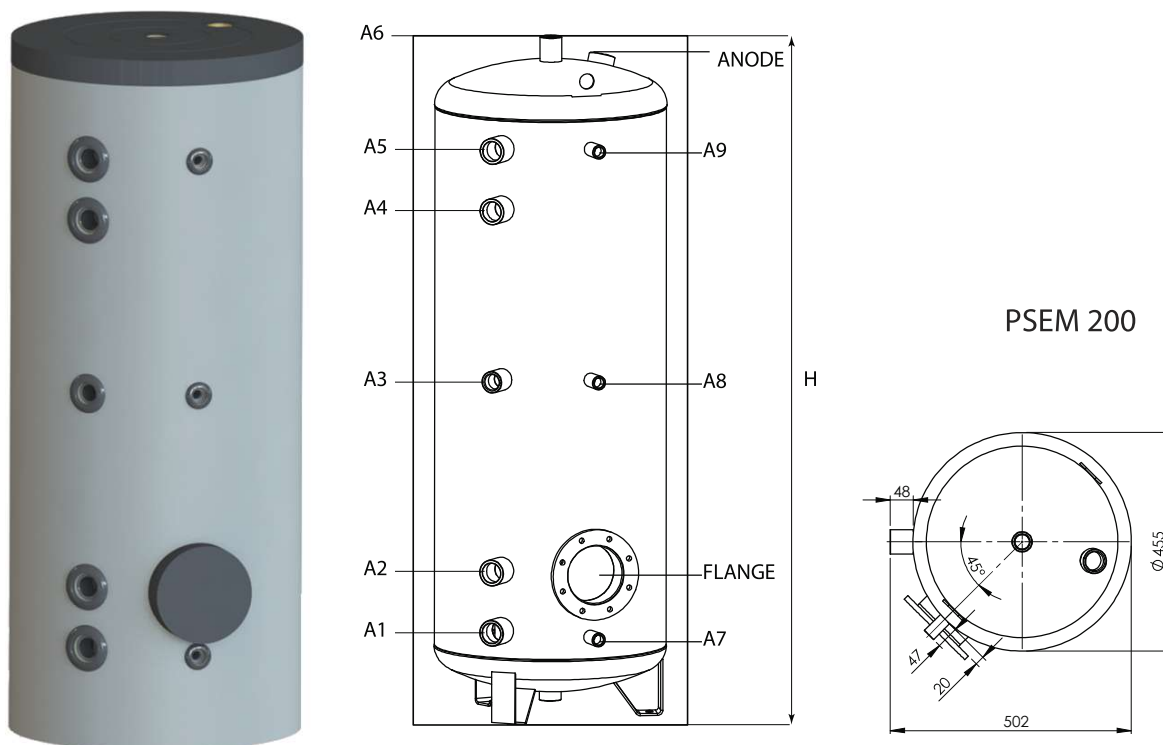

		PSEM 200
Capacity	L	200
Height	H, mm	1340
Minimal vertical clearance	mm	1460
Diameter without insulation /with insulation	D, mm	Ø 455/560
Operating pressure/Max. buffer temperature	bar/°C	10/95
Recommended boiler size, connected to buffer tank	kW	6-10
Weight	kg	64
	A1, mm	Rp1 ^{1/4} "/195
	A2, mm	Rp1 ^{1/4} "/314
	A3, mm	Rp1"/690
	A4, mm	Rp1 ^{1/4} "/1026
	A5, mm	Rp1 ^{1/4} "/1145
	A6, mm	Rp1"/1340
	A7, mm	Rp1/2"/183
	A8, mm	Rp1/2"/690
	A9, mm	Rp1/2"/1145
Inspection hole / Flange	Fl, mm, Ø, mm	180/309 Ø 110
Anodic protector	Anode, mm	Rp1 ^{1/4} "/1340